


Fural
 Rg 14,0-23%
 Perforation \varnothing 14,0 mm
 Share of holes 23 %
 Max. perforation exterior size 598 mm
 Max. tool width roll size 800 mm
 Max. material thickness steel 0,70 mm
 Max. material thickness alu -
 DIN 24041 Designation Rg 14,00-26,00
 Distance horizontal 26,00 mm \rightarrow
 Distance vertical 26,00 mm \downarrow
 Distance diagonal 36,76 mm \searrow
 Direction of perforation: \rightarrow

Sound absorption

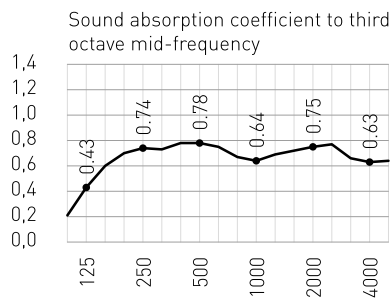

Frequency	Third value	Octave value
100	0,21	
125	0,43	0,40
160	0,60	
200	0,70	
250	0,74	0,70
315	0,73	
400	0,78	
500	0,78	0,75
630	0,75	
800	0,67	
1000	0,64	0,65
1250	0,69	
1600	0,72	
2000	0,75	0,75
2500	0,77	
3150	0,66	
4000	0,63	0,65
5000	0,64	

Air gap 200 mm
 Acoustic fleece Acoustic-Fleece, glued in
 Test certificate P-BA 279/2006 Bild 8
 NRC 0,75
 α_w 0,75 (L)
 Absorber class C (DIN EN 11654)
 Support without