


Fural
Rv 4,5-51%

Perforation \varnothing 4,5 mm
Share of holes 51 %
Max. perforation exterior size 627 mm
Max. tool width roll size 800 mm
Max. material thickness steel 0,70 mm
Max. material thickness alu -
DIN 24041 Designation Rv 4,50-6,00
Distance horizontal 10,40 mm \rightarrow
Distance vertical 3,00 mm \downarrow
Offset spacing 60° 6,00 mm \searrow
Direction of perforation: \rightarrow

Sound absorption

Sound absorption coefficient to third octave mid-frequency

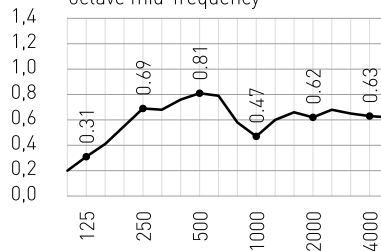

Frequency
Third value
Octave value

f(Hz)	α_s	α_p
100	0,20	
125	0,31	0,30
160	0,41	
200	0,55	
250	0,69	0,65
315	0,68	
400	0,76	
500	0,81	0,80
630	0,79	
800	0,58	
1000	0,47	0,55
1250	0,60	
1600	0,66	
2000	0,62	0,65
2500	0,68	
3150	0,65	
4000	0,63	0,65
5000	0,62	

Air gap 200 mm
Acoustic fleece Acoustic-Fleece, glued in
Test certificate M 105629/21
NRC 0,65
 α_w 0,65 [L]
Absorber class C (DIN EN 11654)
Support without