


	<b>Fural</b>
	Rv 3,0-20%
Perforation $\varnothing$	3,0 mm
Share of holes	20 %
Max. perforation exterior size	1.402 mm
Max. tool width roll size	1.500 mm
Max. material thickness steel	0,70 mm
Max. material thickness alu	1,00 mm
DIN 24041 Designation	Rv 3,00-6,35
Distance horizontal	6,35 mm →
Distance vertical	5,50 mm ↓
Offset spacing 60°	6,35 mm ↘
Direction of perforation:	→

**Sound absorption**

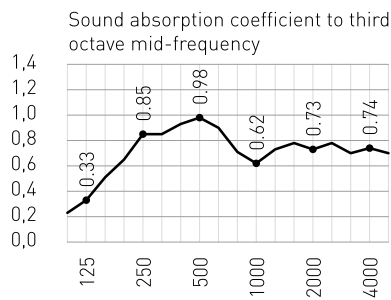

Frequency	Third value	Octave value
-----------	-------------	--------------

f(Hz)	a <sub>s</sub>	a <sub>p</sub>
100	0,23	
125	0,33	0,35
160	0,51	
200	0,65	
250	0,85	0,80
315	0,85	
400	0,93	
500	0,98	0,95
630	0,90	
800	0,71	
1000	0,62	0,70
1250	0,73	
1600	0,78	
2000	0,73	0,75
2500	0,78	
3150	0,70	
4000	0,74	0,70
5000	0,70	

Air gap	200 mm
Acoustic fleece	Acoustic-Fleece, glued in
Test certificate	P-BA 221/2007 Bild 2
NRC	0,80
a <sub>w</sub>	0,75 (L)
Absorber class	C (DIN EN 11654)
Support	without